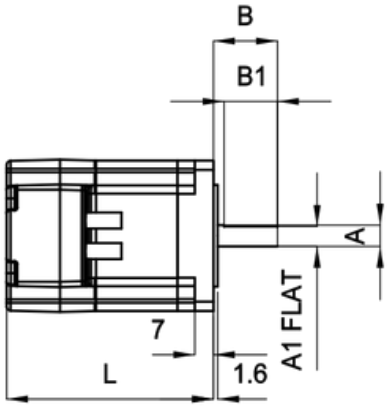
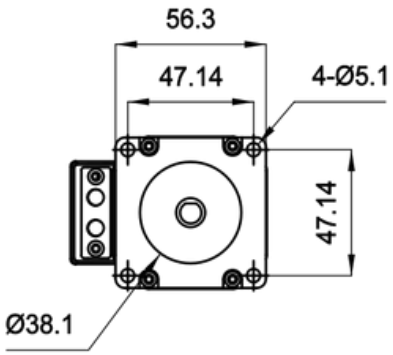
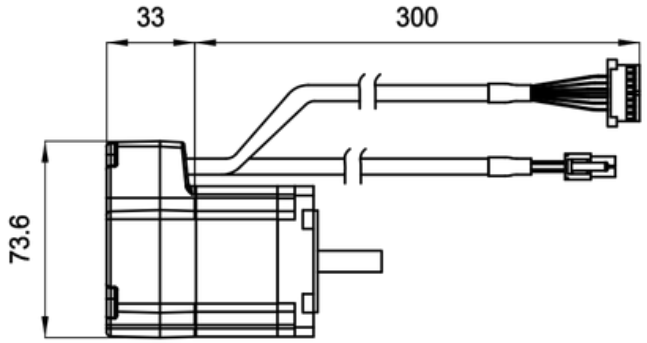



| Compatible model [mm] | | | | | |
|---|---|---|---|---|---|
| MODEL | A | A1 | B | B1 | L |
| AM23RS2DMA | Ø8 | 7.5 | 24 | 20 | 77.5 |
| AM23RS2DMB | Ø6.35 | 5.85 | 20 | 15 | 77.5 |
| AM23RS3DMA | Ø8 | 7.5 | 24 | 20 | 99.5 |
| AM23RS3DMB | Ø6.35 | 5.85 | 20 | 15 | 99.5 |
| AM23RS4DMA | Ø8 | 7.5 | 24 | 20 | 102.5 |

| REV. | REVISION RECORD | DATE |
|---|---|---|
| | Original revision | |

Unit: mm

FIRST ANGLE METHOD

Tolerances for linear and angular dimensions without individual tolerance indications
GB/T 1804-m eqv ISO 2768-1 : m

Geometrical tolerance for features without individual tolerance indications
GB/T 1184-K eqv ISO 2768-2 : K

UNLESS OTHERWISE SPECIFIED

| | NAMES | SIGNATURE | DATE |
|---|---|---|---|
| Approve | | | |
| Standard | | | |
| Technology | | | |
| Check | | | |
| Design | | | |

PIVEXIN TECHNOLOGY

RS Motor

This ducument is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

SCALE 1:1 | Sheet 1 of 1